

WiFi Box for AX



External Box for monitoring the Inverter and power generation data from EFFEKTA Multifunctional Inverter AX via PC, tablet PC or smartphone

NEU / NEW



Properties

- Suitable for EFFEKTA Multifunctional Inverter AX
- Wireless transmission via WLAN
- Integrated WEB server available via PC, tablet PC or smartphone
- Remote display of all important inverter data
- Remote display of the current inverter status
- Remote display of power generation data
- Measurement data history available via central data center
- Event messaging via email
- Simple firmware update via network

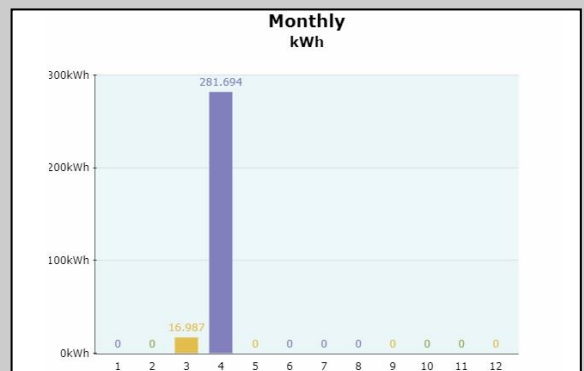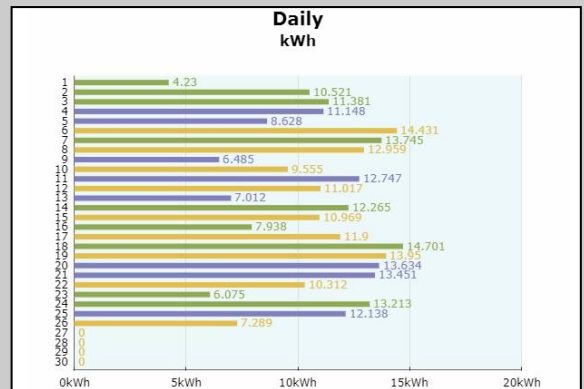

Specifications:

Network protocol	TCP/IP, USP, http, HTTPS, IPv4, SSL
Connection to the inverter	SubD9 (RS232) cable
Power supply	12VDC
Power consumption	Maximum 2 watts
Firmware update	Via network
Operating temperature	-10°C up to 70°C
Humidity	0-95%
Storage temperature	-15°C up to 85°C
Dimensions (HxWxD max.)	30 x 89 x 123 without antenna 126 x 89 x 136 including antenna

Above: Power generation data can be accessed via PC, smartphone or tablet PC in the web browser.